

TEST REPORT

1. Applicant

Client Name : FEELUX Co. Ltd.

Address : 235-48 Gwangjeok-ro Gwangjeok-myeon Yangju-si Gyeonggi-do 482-844 Korea

Date of Receipt : 20151202

2. Purpose of Report : Sample test

3. Test Standard / Item : LED / NDV4 40K-24V -2

4. Test Period : 20151202 ~ 20151202

5. Test Environment

Ambient Temp. : (22.06 +- 3) °C

Relative Humidity : (14.68 +- 10) % RH

6. Test Result : Refer to the attachment

Test Item

Name of Product :

Model / Rating :

Model :

Rating :

Confirmation	Test by JinCheol, Kim	Technical manager Soobeom, Park
--------------	--------------------------	------------------------------------

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This report cannot be reproduced, except in full.

This report is for reference only. It cannot replace the report by standard organization(s).

TEST RESULT

Report Number	Sample Name	Sample Number	Test Standard
20151203-0004			LED

Test Item	Unit	Result	Memo
Beam Distribution Test	-	See attachment	
ATHD	%	0.0	
CIE 1931 Cxy		0.3732, 0.3708	
Correlated Color Temperature	K	4169	
Ra	-	84.58	
Power Factor	%	1.000	
Input Voltage	V	24.980	
Input Current	A	0.150	
Input Watt	W	3.76	
Lamp Flux	lm	307.8	
Efficient	lm/W	82.15	
Illuminance	lx	122	1 m
		31	2 m
		14	3 m


* This test result is for the sample provided by the client.

Sample photo

Click to load image

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\WNV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

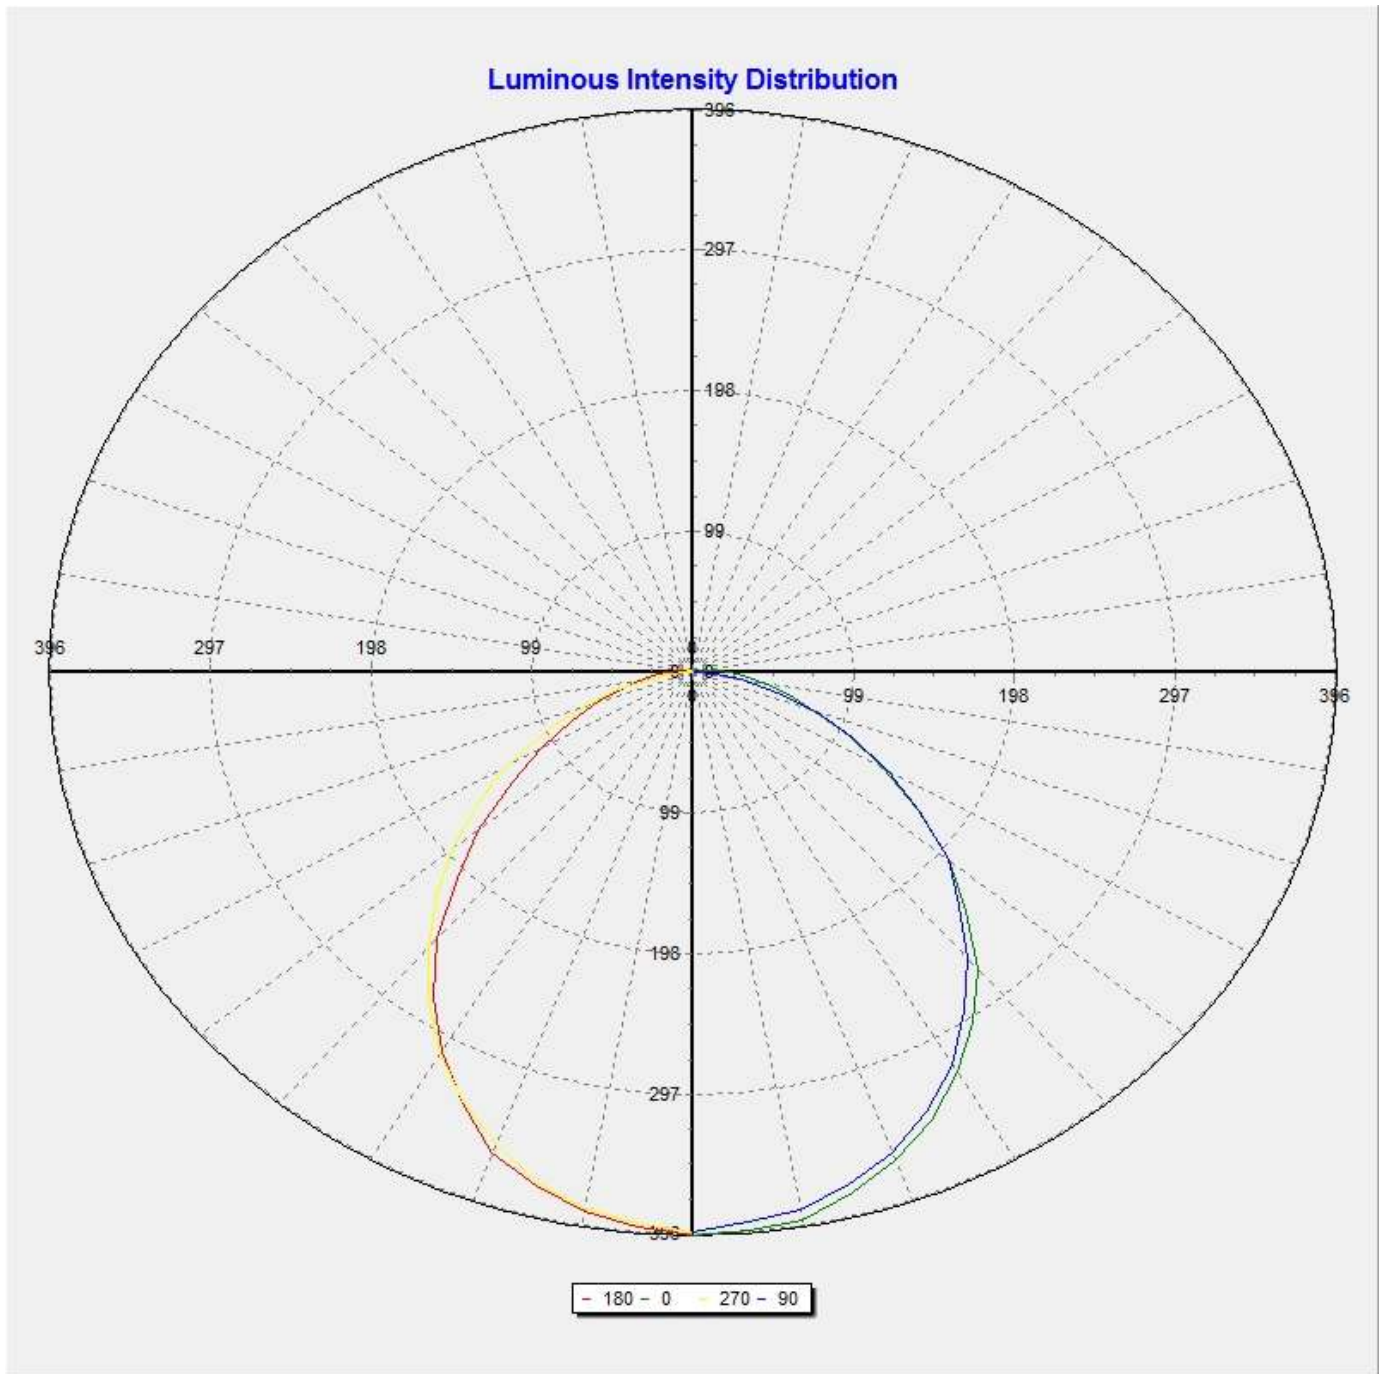

All luminous intensity values are in Cd/Klm unit.

Luminaire

Lamp

Report

20151203-0004

No. of lamps 1

Filename: C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\WNV4 40K-24V.jdt

Lamp flux (lm) 308


Operator: nt (A) 0.15

Total flux (lm) 308

Date: Power Factor 1

2015-12-04 오전 10:13:52

Luminous Intensity Distribution (Lowest 10%)

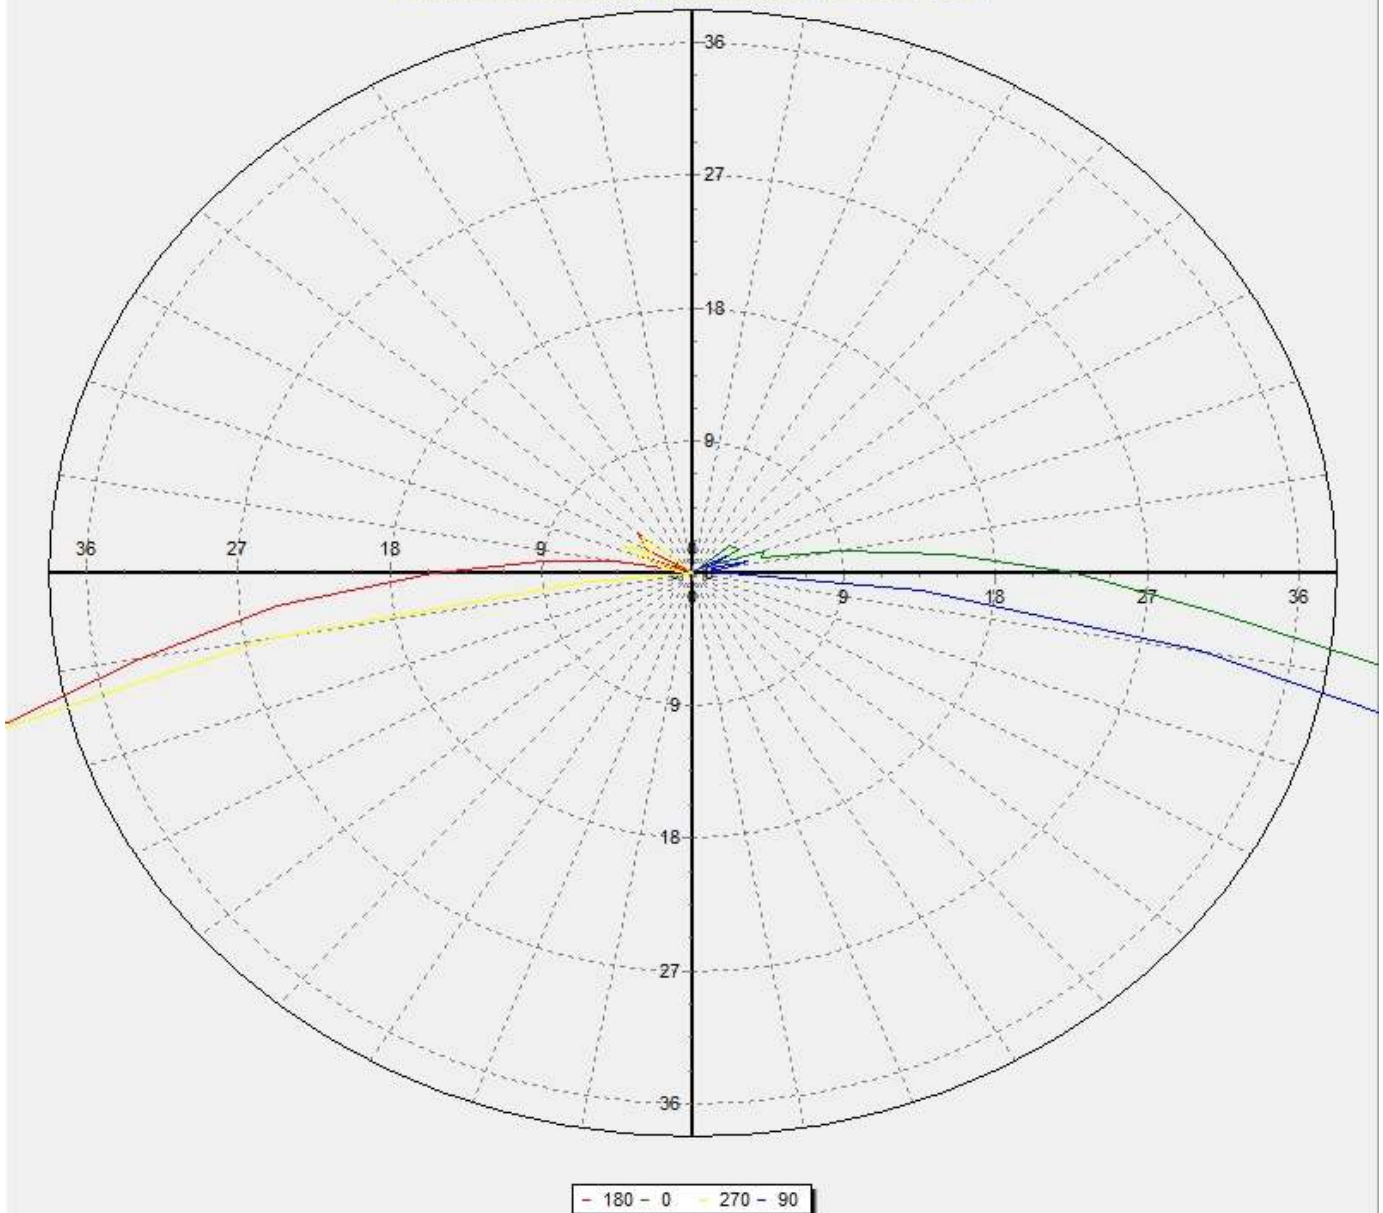

All luminous intensity values are in Cd/Klm unit.

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\NDV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

Luminous Intensity Data

GWC	0	10	20	30	40	50	60	70	80	90	100	110	120
0	122.19	122.18	122.12	122.10	121.90	120.91	121.77	121.52	120.87	121.28	120.99	121.02	121.11
5	121.60	121.59	121.74	121.38	121.07	120.71	120.71	121.24	121.40	119.84	120.27	120.53	120.62
10	120.51	120.54	118.95	119.92	119.71	119.57	119.22	118.71	118.86	118.38	119.25	119.19	118.92
15	117.03	116.72	116.39	116.55	116.18	115.89	116.04	115.54	115.16	115.07	114.73	114.92	115.15
20	112.46	112.85	112.71	111.90	111.90	111.84	111.88	110.44	110.87	110.86	110.95	110.60	110.29
25	107.49	106.30	107.69	106.98	106.77	105.52	105.49	105.71	104.92	105.07	104.94	105.36	104.86
30	100.10	100.98	100.73	99.59	101.18	98.67	99.14	98.14	99.73	98.30	98.79	97.25	97.78
35	92.76	93.23	92.72	92.95	91.71	90.98	91.31	90.30	90.41	89.51	90.51	89.18	89.85
40	84.25	83.57	83.28	84.01	83.29	82.51	82.93	81.84	81.07	80.94	81.56	80.91	81.74
45	73.09	73.22	73.85	73.48	74.47	74.39	73.51	72.61	72.47	71.59	71.90	71.93	71.75
50	63.33	62.23	62.88	63.55	63.79	64.26	64.26	62.55	62.72	63.19	62.93	62.44	62.42
55	52.08	52.26	53.02	53.64	54.31	53.75	54.32	53.67	53.29	52.62	52.79	52.51	52.43
60	41.25	41.41	41.61	42.53	44.27	44.42	44.60	44.53	43.17	43.08	42.83	42.99	42.56
65	32.69	31.93	33.14	33.54	35.35	34.98	35.69	35.75	34.60	33.61	33.58	33.28	32.75
70	24.69	23.93	25.54	25.47	26.25	26.54	26.51	26.28	25.78	25.08	25.02	25.19	25.22
75	18.97	18.36	19.04	19.25	19.58	19.29	19.79	18.87	17.68	16.64	18.67	17.39	17.47
80	14.29	13.59	14.35	14.18	13.89	14.29	12.98	11.31	10.81	9.41	9.87	10.26	12.37
85	9.63	10.43	10.02	10.08	9.18	8.64	7.58	5.65	4.65	4.19	4.40	5.96	6.87
90	7.01	6.77	6.39	6.52	5.62	5.22	4.64	1.94	2.10	0.66	0.99	1.99	3.80
95	4.74	4.32	4.72	4.04	3.88	2.38	1.51	0.82	0.75	0.30	1.14	0.62	1.31
100	2.72	2.75	2.45	2.68	2.40	1.50	0.38	0.86	0.67	0.59	0.24	0.40	0.79
105	1.30	1.63	1.68	1.15	0.48	0.48	1.32	0.31	-0.14	1.03	0.49	0.69	0.79
110	1.39	0.40	0.35	0.97	0.70	0.81	0.49	0.40	0.45	0.36	0.88	0.53	0.72
115	0.43	0.19	0.31	0.25	0.38	0.89	0.58	0.20	0.91	0.34	0.77	0.66	0.06
120	1.00	0.48	-0.19	1.09	1.58	0.17	0.33	0.01	0.53	0.73	0.27	-0.35	0.84
125	0.93	0.29	0.52	0.69	0.60	0.43	0.71	0.65	0.25	0.24	-0.12	0.56	1.36
130	0.87	1.23	0.41	0.34	1.05	1.16	0.57	1.00	1.06	0.25	1.19	-0.05	0.88

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\NDV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

Luminous Intensity Data (Continued)

GWC	130	140	150	160	170	180	190	200	210	220	230	240	250
0	120.64	121.15	120.50	121.09	121.12	122.19	122.18	122.12	122.10	121.90	120.91	121.77	121.52
5	120.79	119.99	120.36	121.22	120.23	120.92	121.05	120.98	121.97	120.85	119.68	120.77	120.71
10	118.67	119.07	119.13	118.92	118.17	118.82	118.72	118.96	119.18	118.84	119.10	118.92	118.79
15	115.73	114.98	115.06	115.17	115.16	115.16	115.49	115.09	114.04	114.82	115.44	114.06	114.61
20	110.29	110.40	110.42	110.64	111.42	111.11	110.39	110.20	110.55	110.00	109.44	109.36	109.65
25	104.37	104.55	105.51	105.24	105.00	103.14	102.98	103.73	103.87	104.30	102.70	103.21	103.93
30	97.73	97.40	98.95	97.27	96.90	95.08	95.85	95.57	96.11	96.21	96.01	96.71	96.75
35	89.80	89.09	89.50	88.83	88.43	85.88	86.74	86.16	87.18	87.13	87.37	88.05	88.12
40	81.15	80.08	79.43	78.48	78.16	75.36	75.57	76.43	76.97	77.83	79.50	78.75	78.27
45	70.88	70.36	68.37	68.10	66.87	63.33	64.89	64.85	66.40	66.92	68.24	68.98	69.03
50	60.16	59.73	57.75	56.67	55.82	53.03	52.97	53.87	55.27	57.20	58.04	59.06	58.97
55	50.44	49.74	47.67	46.62	45.14	41.83	42.71	43.12	45.02	45.79	48.13	48.89	49.38
60	41.08	39.97	37.57	36.42	35.50	33.06	32.71	34.14	36.07	36.65	38.90	39.49	40.30
65	31.73	31.30	28.97	28.35	26.97	25.02	25.34	25.46	27.43	28.48	29.43	30.67	31.13
70	24.31	23.38	22.43	21.20	20.77	19.05	19.41	19.71	20.66	20.83	22.44	21.99	22.36
75	17.24	17.23	16.82	16.28	15.73	13.87	14.67	14.85	14.70	15.36	15.71	15.60	15.28
80	12.69	12.20	12.30	11.87	11.35	10.28	10.79	10.82	10.17	10.50	11.01	9.49	9.09
85	7.39	8.55	7.85	8.06	8.03	7.65	7.38	7.49	7.44	6.78	5.86	5.55	4.44
90	4.09	5.26	5.17	4.90	5.69	4.75	5.38	4.70	4.85	3.31	2.93	2.38	1.08
95	2.09	2.59	2.59	3.27	3.42	2.75	2.94	2.47	2.74	2.34	1.61	0.56	0.01
100	0.76	1.01	1.82	1.15	1.83	1.44	1.62	1.72	0.51	0.39	0.35	0.76	0.18
105	0.31	0.21	0.01	0.71	0.88	0.33	0.61	0.44	0.19	-0.25	0.63	0.75	0.64
110	0.77	0.35	0.37	0.56	0.12	1.11	0.57	0.79	0.38	0.99	0.37	0.30	0.02
115	1.24	0.10	-0.21	-0.19	-0.17	-0.04	0.63	0.46	0.89	0.95	0.92	0.13	0.56
120	0.35	0.61	0.91	0.66	0.43	1.00	0.38	0.59	0.40	0.20	-0.06	0.71	0.36
125	1.05	0.61	0.75	0.49	0.55	1.12	0.85	0.69	1.04	0.48	0.69	0.17	0.51
130	0.75	0.60	0.82	1.26	1.64	1.29	0.92	2.13	0.84	1.49	1.10	0.47	0.65

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\NDV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

Luminous Intensity Data (Continued)

GWC	260	270	280	290	300	310	320	330	340	350	360
0	120.87	121.28	120.99	121.02	121.11	120.64	121.15	120.50	121.09	121.12	122.19
5	121.02	120.11	120.27	120.42	120.11	120.54	120.31	120.77	120.85	119.82	121.60
10	118.03	118.11	118.16	117.26	117.79	117.36	118.59	118.86	118.28	118.02	120.51
15	113.53	114.55	115.02	114.56	113.83	114.61	114.59	114.95	114.80	114.77	117.03
20	110.15	109.03	109.11	109.45	109.85	110.10	109.00	109.74	110.09	110.51	112.46
25	103.87	102.94	102.81	103.67	103.60	103.89	104.14	104.61	103.79	104.47	107.49
30	95.76	95.70	95.76	95.74	96.96	96.45	97.36	97.46	97.02	97.70	100.10
35	87.55	87.25	87.44	88.36	88.84	89.54	88.96	90.08	88.49	89.36	92.76
40	78.41	78.10	78.81	79.12	79.55	80.22	79.92	80.12	79.41	79.94	84.25
45	69.45	68.61	69.25	70.14	70.12	71.13	71.23	70.44	69.67	69.90	73.09
50	58.94	59.66	59.38	60.31	60.76	61.61	60.17	59.47	59.24	59.50	63.33
55	48.91	49.58	49.94	50.59	50.15	51.03	49.80	50.22	48.86	48.38	52.08
60	39.64	40.86	40.13	40.93	41.31	41.13	39.89	40.00	38.74	38.18	41.25
65	30.68	31.03	31.20	32.19	31.49	32.53	31.92	30.50	29.30	29.89	32.69
70	22.39	22.58	22.64	23.35	23.96	24.44	23.65	23.86	22.72	22.08	24.69
75	15.08	14.51	14.67	15.62	16.35	16.98	17.33	17.34	17.58	17.33	18.97
80	7.15	7.84	8.18	10.12	10.76	11.12	12.83	12.15	12.30	12.54	14.29
85	2.21	1.91	2.86	4.19	6.14	7.69	8.22	9.47	8.28	9.40	9.63
90	0.56	-0.10	0.09	1.32	3.11	4.19	4.94	5.08	5.92	6.09	7.01
95	-0.25	0.08	0.20	0.79	0.76	2.05	2.78	3.23	3.69	4.03	4.74
100	0.02	0.59	0.46	1.05	0.28	0.66	0.59	2.00	2.10	2.95	2.72
105	0.43	0.29	-0.49	0.41	0.48	0.12	1.30	0.60	0.52	1.24	1.30
110	0.46	1.11	0.22	0.93	0.44	0.78	0.53	0.38	0.58	0.38	1.39
115	0.82	1.37	1.39	0.46	0.57	1.17	0.90	1.11	0.32	0.55	0.43
120	0.85	0.83	0.95	1.03	0.94	1.15	0.26	0.95	1.51	0.33	1.00
125	0.91	1.15	0.75	0.72	0.13	0.78	-0.23	1.12	0.33	0.18	0.93
130	0.98	1.19	0.62	0.91	0.60	1.11	0.94	1.12	0.96	0.93	0.87

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\NDV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

Luminous Flux Table

Total Lamp Lumens: 308
 Luminaire Efficiency (lm/W): 307.82
 CIE Classification: Direct

Elevation	Lumens	Cumulative	Lamp %	Luminaire %
0	0.73	0.73	0.24	0.24
5	5.77	6.49	2.11	2.11
10	11.31	17.80	5.78	5.78
15	16.34	34.14	11.09	11.09
20	20.73	54.87	17.83	17.82
25	24.24	79.11	25.70	25.70
30	26.74	105.85	34.39	34.39
35	28.06	133.92	43.51	43.51
40	28.20	162.12	52.67	52.67
45	27.19	189.31	61.50	61.50
50	25.17	214.48	69.68	69.68
55	22.36	236.84	76.95	76.94
60	19.01	255.85	83.12	83.12
65	15.48	271.33	88.15	88.15
70	12.04	283.38	92.07	92.06
75	8.93	292.31	94.97	94.96
80	6.14	298.44	96.96	96.95
85	3.79	302.24	98.19	98.19
90	2.12	304.36	98.88	98.88
95	1.17	305.53	99.26	99.26
100	0.64	306.17	99.47	99.46
105	0.32	306.49	99.57	99.57
110	0.30	306.79	99.67	99.66
115	0.27	307.06	99.76	99.75
120	0.29	307.35	99.85	99.85
125	0.27	307.62	99.94	99.94
130	0.20	307.82	100.01	100.00

Luminaire

Lamp

Report

20151203-0004

No. of lamps 1

Filename: C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\W\NDV4 40K-24V.jdt

Lamp flux (lm) 308



Operator: nt (A) 0.15

Total flux (lm) 308

Date: Power Factor 1

2015-12-04 오전 10:13:52

IsoCandela (Type C)

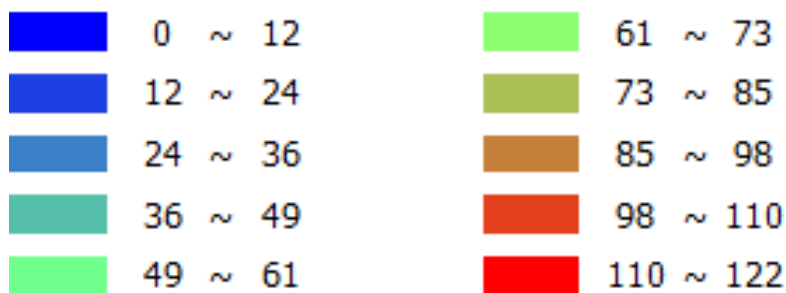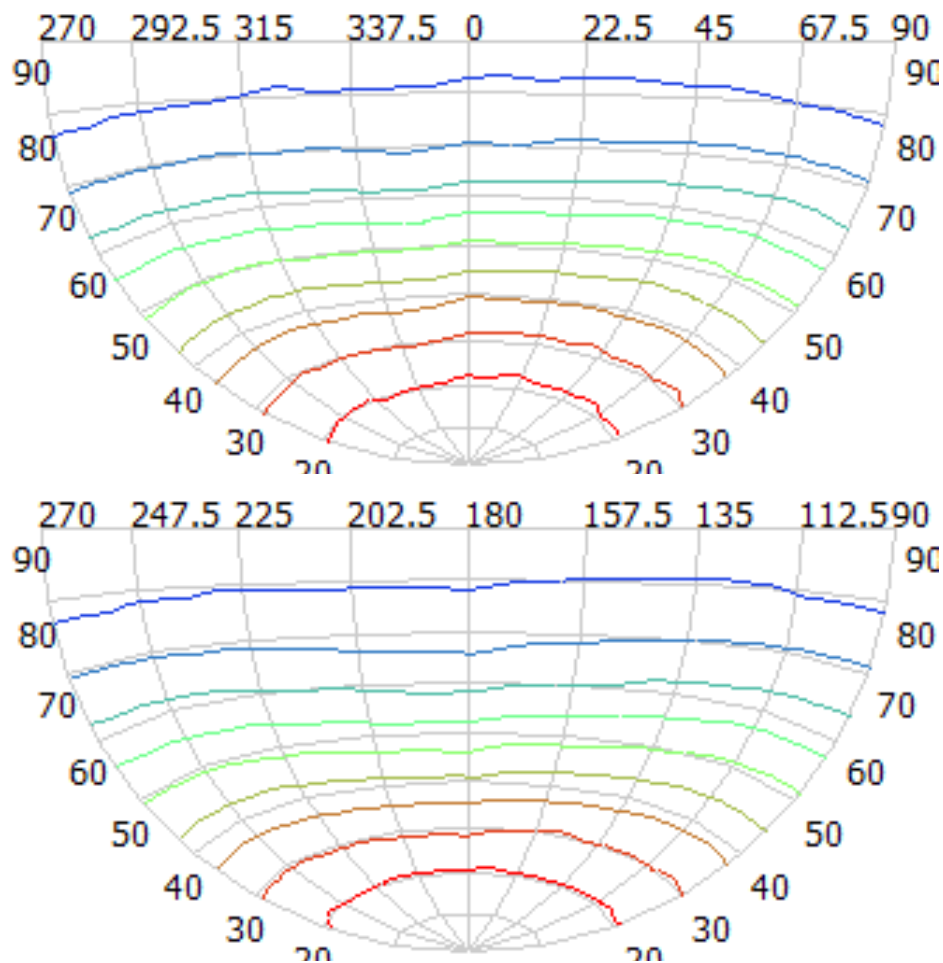

Luminaire

Lamp

Report

20151203-0004

No. of lamps 1

Filename: C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\W\NDV4 40K-24V.jdt

Lamp flux (lm) 308


Operator: nt (A) 0.15

Total flux (lm) 308

Date: 2015-12-04 오후 10:13:52

2015-12-04 오전 10:13:52

IsoLux Diagram (Ground)

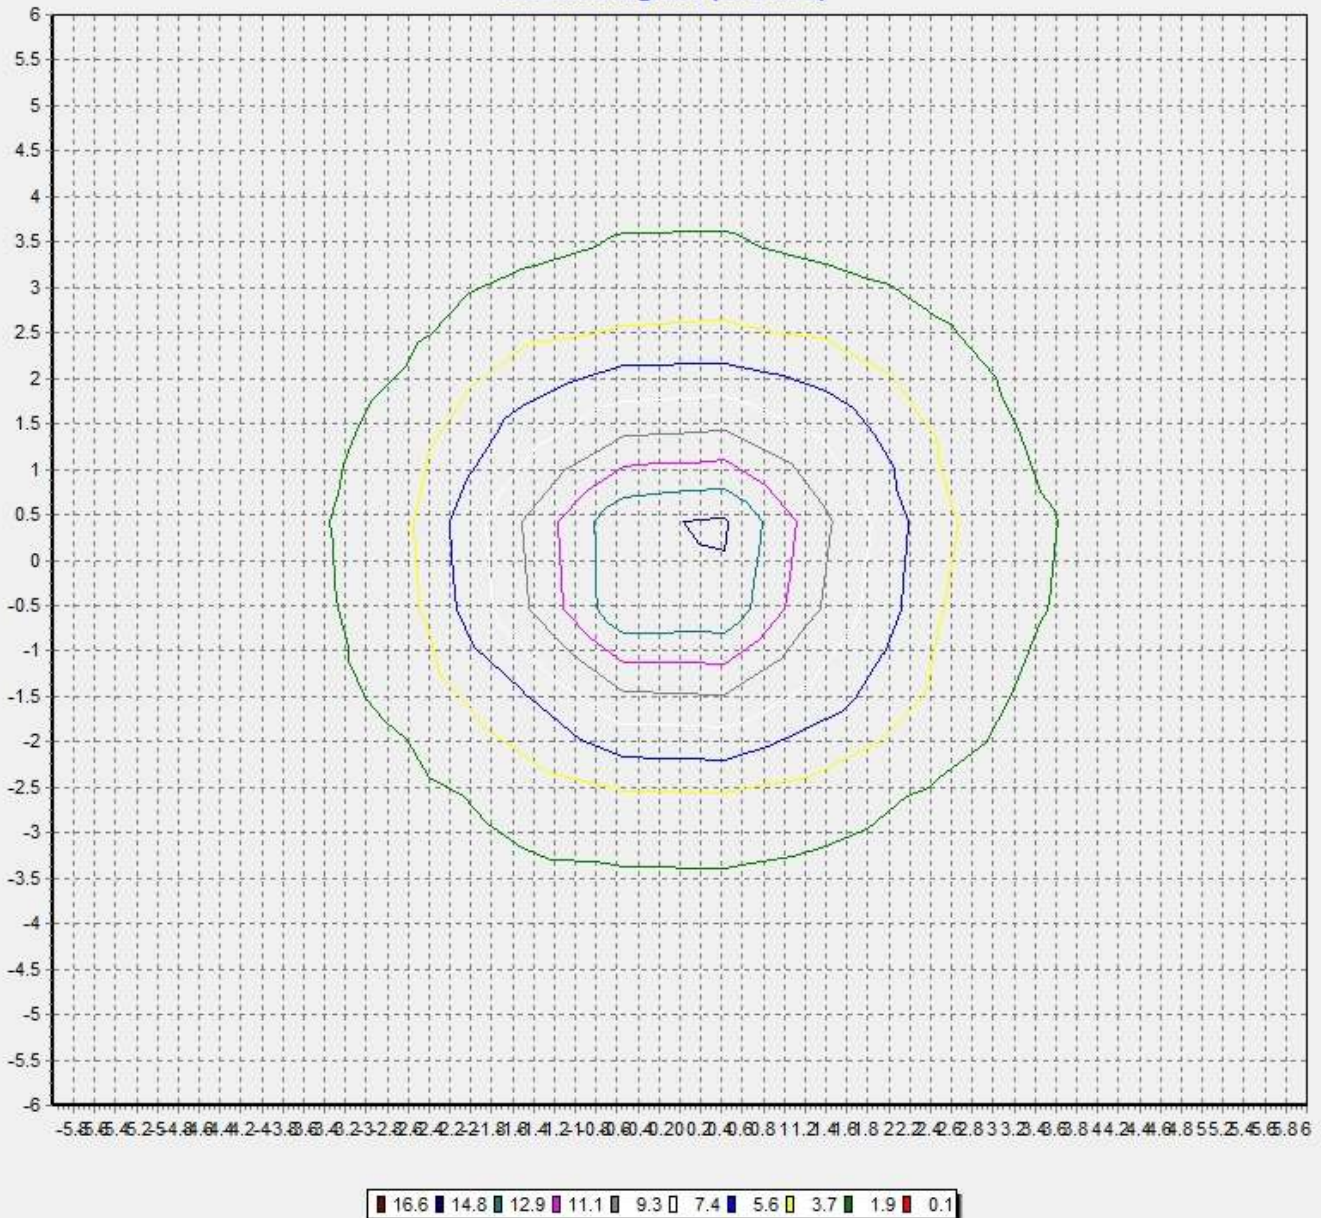


Pole Height (m): 2.7

Area Width (m): 12

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\W\NDV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

IsoLux Diagram (Wall)

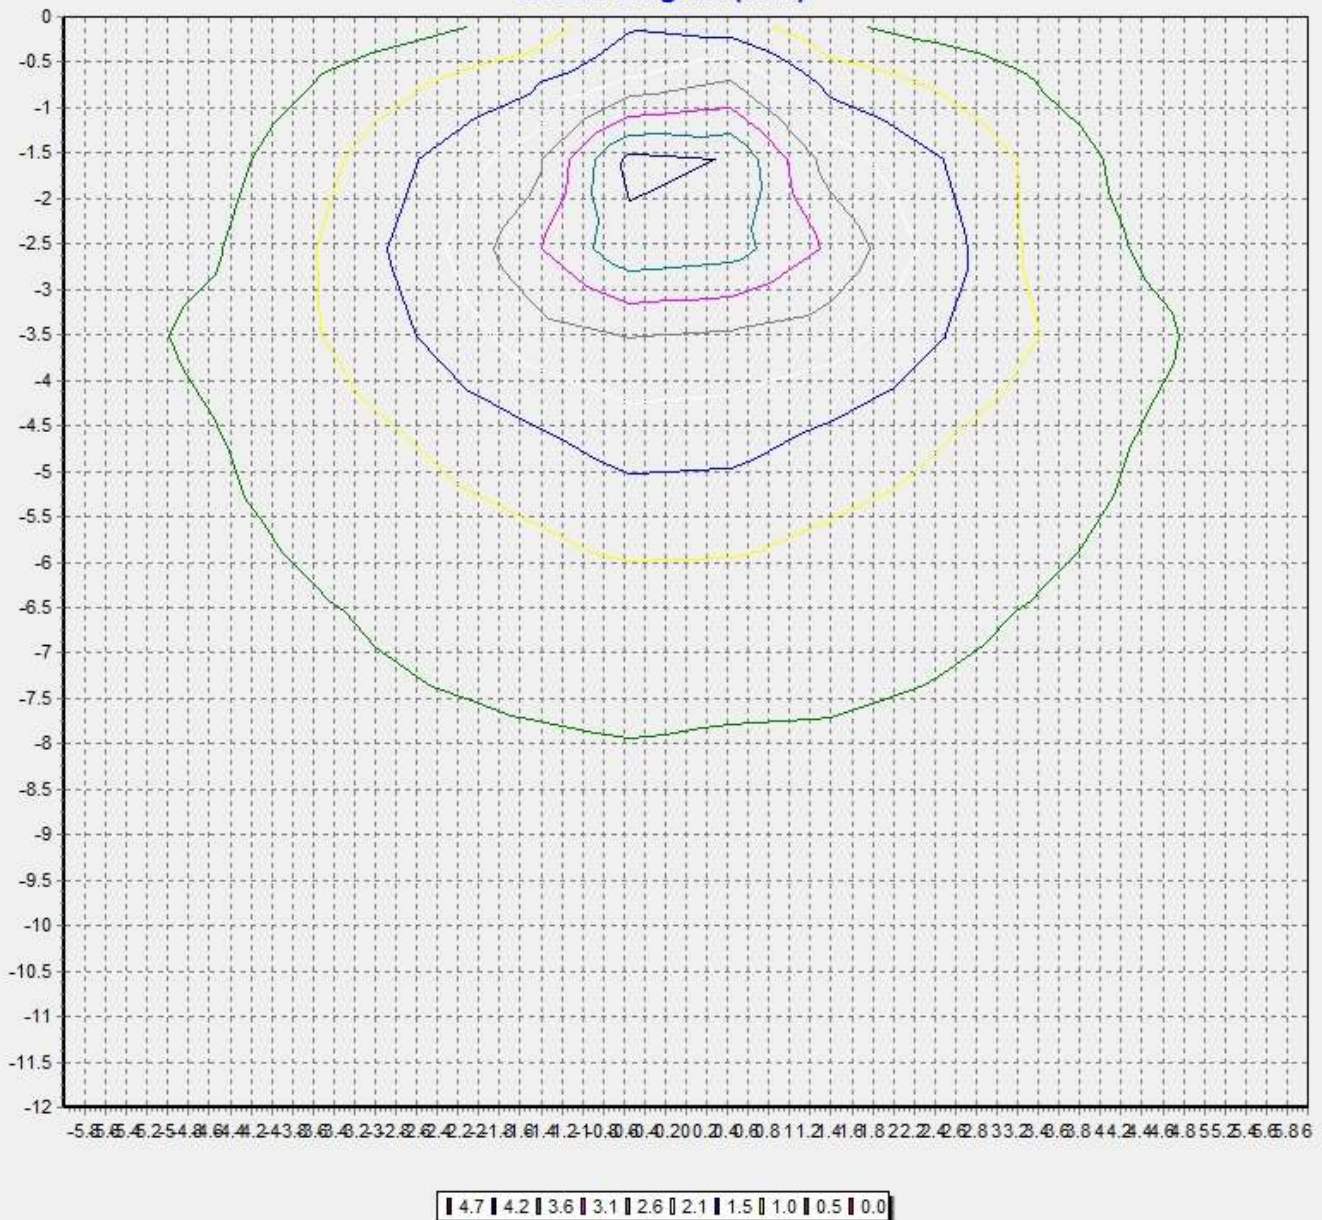

Pole Height (m): 2.7 Wall Distance (m): 2.7
 Aiming Plane: 0 Wall Height (m): 12

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24.98
Lamp flux (lm)	308	Current (A)	0.15
Total flux (lm)	308	Power Factor	1

Report

20151203-0004

Filename C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\NDV4 40K-24V.jdt

Operator

Date

2015-12-04 오전 10:13:52

Illuminance Levels (Ground)

6.00	0.11	0.15	0.15	0.20	0.33	0.37	0.39	0.39	0.34	0.21	0.16	0.16	0.12
5.00	0.15	0.16	0.30	0.43	0.45	0.68	0.73	0.69	0.48	0.45	0.33	0.17	0.16
4.00	0.14	0.30	0.36	0.71	0.85	1.34	1.47	1.34	0.88	0.75	0.39	0.32	0.16
3.00	0.19	0.38	0.69	0.99	1.66	2.38	2.73	2.44	1.71	1.03	0.75	0.42	0.20
2.00	0.28	0.38	0.78	1.54	3.56	5.14	6.81	5.22	3.66	1.68	0.85	0.43	0.32
1.00	0.32	0.58	1.18	2.20	5.05	9.63	12.99	9.86	5.29	2.40	1.33	0.67	0.36
0.00	0.30	0.57	1.22	2.35	6.57	13.00	16.76	13.21	6.96	2.76	1.47	0.71	0.38
-1.00	0.29	0.54	1.11	2.06	4.86	9.53	12.92	9.54	5.06	2.27	1.25	0.62	0.34
-2.00	0.26	0.34	0.71	1.41	3.37	5.00	6.63	5.02	3.50	1.58	0.80	0.40	0.30
-3.00	0.16	0.35	0.63	0.87	1.54	2.25	2.60	2.30	1.60	0.97	0.70	0.40	0.19
-4.00	0.12	0.27	0.32	0.64	0.78	1.25	1.39	1.26	0.82	0.70	0.36	0.30	0.15
-5.00	0.13	0.14	0.27	0.40	0.42	0.63	0.69	0.65	0.42	0.41	0.30	0.16	0.15
-6.00	0.09	0.13	0.14	0.18	0.30	0.35	0.37	0.35	0.31	0.19	0.14	0.15	0.11
-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	

Illum. (Max.): 16.8

All illuminance level values are in lux.

Illum. (Min.): 0.09

Illum. Avg.: 1.73

Total Optical Solution Provider




<http://www.jnctech.co.kr>
J & C Technology Co., Ltd.

Luminaire

Lamp		Report	20151203-0004
No. of lamps	1	Filename	C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\W\NDV4 40K-24V.jdt
Lamp flux (lm)	308	Operator	nt (A) 0.15
Total flux (lm)	308	Date	2015-12-04 오전 10:13:52
		Power Factor	1

Illuminance Cone Diagram

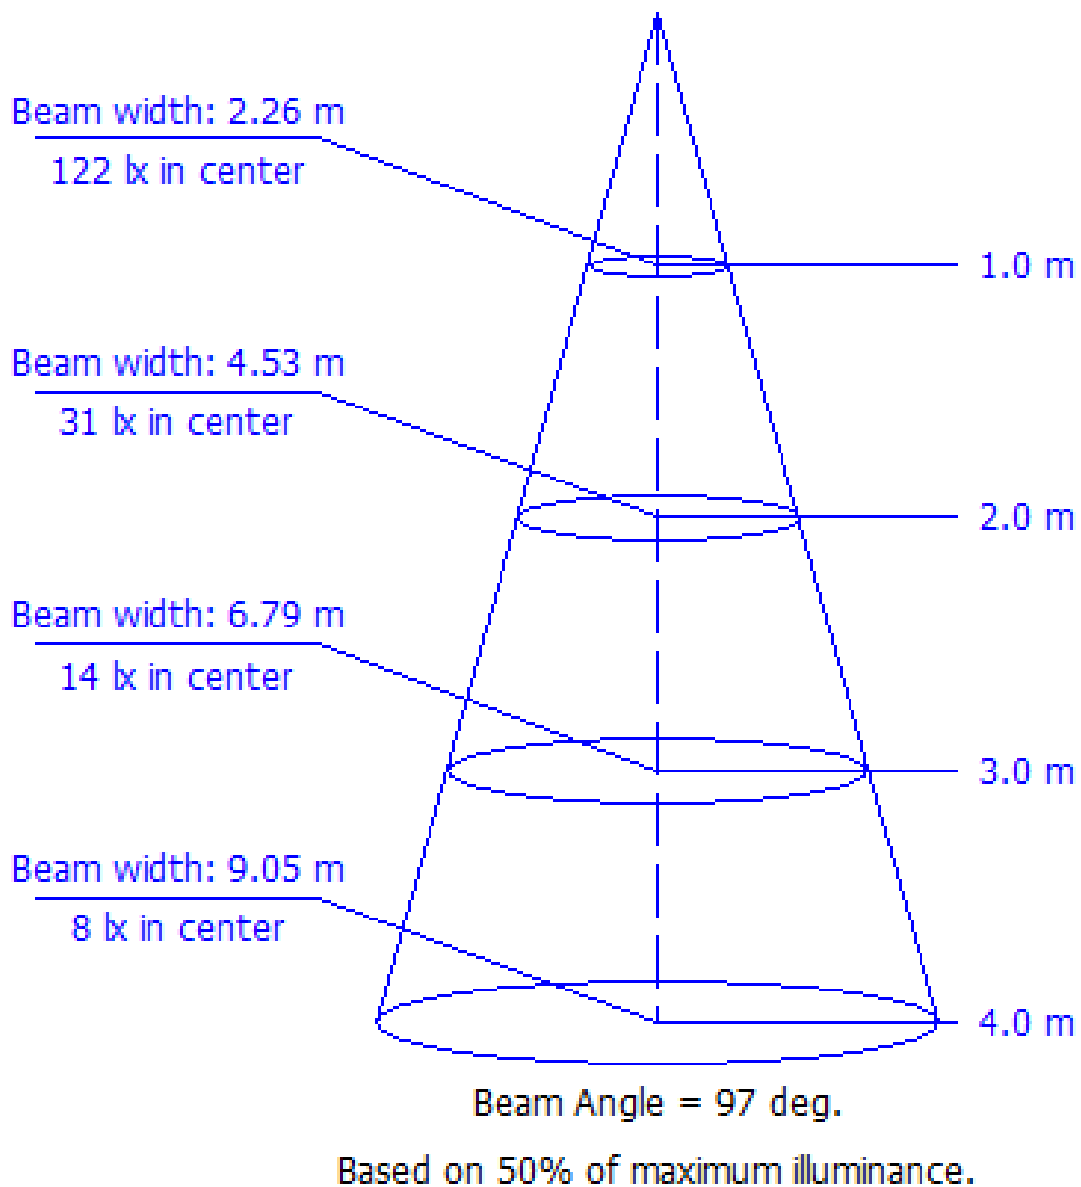

Luminaire

Lamp				Report		20151203-0004	
No. of lamps	1	Voltage (V)	24.98	Filename C:\Users\WFEELUX\Desktop\완료 리포트\Data\151203\NDV4 40K-24V.jdt			
Lamp flux (lm)	308	Current (A)	0.15	Operator			
Total flux (lm)	308	Power Factor	1	Date		2015-12-04 오전 10:13:52	

Coefficient of Utilization

Refl. Ceiling (%)	80%	80%	80%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
Refl. Wall (%)	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
Eff. Floor Cavity Refl.	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Room CR 0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	0.98
Room CR 1	1.04	1.00	0.96	1.01	0.97	0.94	0.97	0.94	0.91	0.93	0.90	0.88	0.89	0.87	0.85	0.83
Room CR 2	0.91	0.84	0.79	0.89	0.83	0.78	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.70
Room CR 3	0.80	0.73	0.66	0.79	0.72	0.66	0.76	0.69	0.64	0.73	0.67	0.63	0.70	0.66	0.62	0.60
Room CR 4	0.72	0.63	0.57	0.70	0.62	0.56	0.68	0.61	0.55	0.65	0.59	0.54	0.63	0.58	0.54	0.51
Room CR 5	0.64	0.56	0.49	0.63	0.55	0.49	0.61	0.54	0.48	0.59	0.53	0.48	0.57	0.51	0.47	0.45
Room CR 6	0.58	0.50	0.43	0.57	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.42	0.52	0.46	0.42	0.40
Room CR 7	0.53	0.44	0.39	0.52	0.44	0.38	0.50	0.43	0.38	0.49	0.42	0.38	0.47	0.42	0.37	0.35
Room CR 8	0.48	0.40	0.35	0.48	0.40	0.34	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32
Room CR 9	0.45	0.37	0.31	0.44	0.36	0.31	0.43	0.36	0.31	0.42	0.35	0.31	0.40	0.35	0.30	0.29
Room CR 10	0.41	0.34	0.28	0.41	0.33	0.28	0.40	0.33	0.28	0.39	0.32	0.28	0.38	0.32	0.28	0.26